

CORNER RECORD

COUNTY OF Plumas T. 27 N R. 12 E Mt. Diablo MERIDIAN CALIFORNIA

CORNER TYPE: GOV'T. CORNER ☒ MEANDER ☐ RANCHO ☐ CONTROL ☐ OTHER ☐

CORNER IDENTIFICATION — DATE OF VISIT 10-18-98 revisited.
10-08-97

R12	R13
25	30
36	31

CORNER — LEFT AS FOUND ☒ FOUND AND TAGGED ☐ REESTABLISHED OBLITERATED CORNER ☐ REBUILT ☐

PHYSICAL DESCRIPTION OF CORNER FOUND, EVIDENCE AND METHOD USED TO IDENTIFY OR REESTABLISH

GLO Notes 1878

Granite stone 18" x 18" x 10"

Pine 20" dia. Bears S 46° E, 71 links(46.8 ft.)

Pine 24" dia. Bears N 42° E, 105 links(69.3 ft.)

Pine 30" dia. Bears S 35° W, 60 links(39.6 ft.)

Pine 16" dia. Bears N 26° W, 91 links(60 ft.)

Found

Granite stone 18" x 18" x 7", 1 & 1/2" iron pipe with DWR brass cap in rock mound near paddle board

Pine 28" dia. Bears S 46° W, 46.3 ft.

Decayed stump with scribe N 44° E, 68.1 ft.

Pine 36" dia. Bears S 33° W, 39.9 ft.

Decayed stump with tag N 28° W, 60.5 ft.

PHYSICAL DESCRIPTION OF MONUMENTS REBUILT OR PERPETUATED

CALIFORNIA COORDINATE SYSTEM ORDER: FIRST ☐ SECOND ☐ THIRD ☐

STATIONS USED: NGS (USC & GS) ☐ STATE ☐ COUNTY ☐ OTHER ☐ STATION _____

ZONE _____ ELEVATION _____ NORTHINGS (Y) _____ EASTINGS (X) _____

SKETCH: (Include reference tie or witness points, remarks and topo of area)

Attached: Exhibit 'A' Sketch, Exhibit 'B' Photos

References: (1) * GLO notes

(2) Antelope Lake Quadrangle Map 604-1C

* indicates that a copy is included

SURVEYOR'S CERTIFICATE

THIS CORNER RECORD WAS PREPARED BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE LAND SURVEYORS ACT ON October

SIGNED: John E. CaplanL.S. or R.C.E. No. 1025

COUNTY SURVEYOR'S CERTIFICATE

THE CORNER RECORD WAS RECEIVED 10/20 19 98


AND EXAMINED AND FILED 11/2 19 98

BY: Tom Hunter

TITLE: Co. Surveyor

DOCUMENT No. 160


STATEMENT ON BACK OF SHEET



160



#1

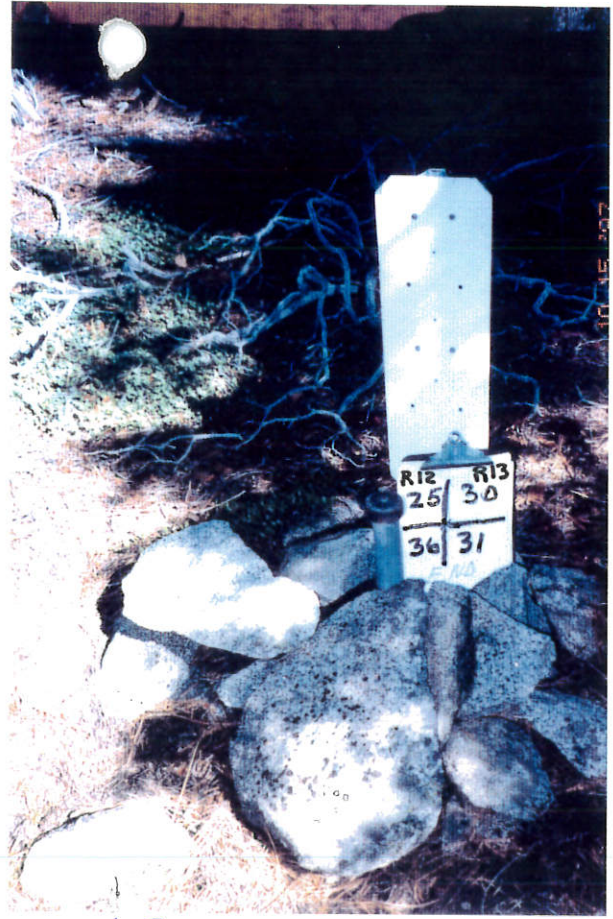

#2

Exhibit 'B'
SOUTHEAST CORNER OF
SECTION 25
T21N R12E M.D.M



SCRIBING ON DOWNED LOG #4
AREA PHOTO #4



#5

SECTION CORNER

10-08-97

MEILLO

MUSSETT

NEILSON

OFF ROAD

27 N 41 E

NO K-TAGS ALONG ROAD,
130 MILES FROM 27 N 62 FORK.

Photo #1

20" DIA

2.5' STUMP

DELAYED WITH TAG

Cap
stamping

T 27 N
E 25° 30' 30"
R 36° 31' 17"
1963

TAGS

OLD TAG

OCT 4, 1939

NEW TAG

S 04 E T 27 N

105 LKS R 12 E

Posted

C.A. 9-74

FND 1 1/2 IP
WITH DWR BRASS CAP
18" ABOVE GROUND IN
ROCK MOUND.

No Scale

Photo #3

Found scribbles on
down rotting log
3' ABOVE
GROUND.

DELAYED
STUMP

Rusty

TAG ON
GROUND

S 30° W

52 LKS

Posted PETERS

9-74

Photo #2

WHITE
PADDLE

FND 11"
18" x 18" x 7"
(18" x 18" x 10")
(S 35° W, 39.6')
S 33° W
39.9'

36" DIA (30" Pine)
PINE WITH BLAZE

TAG

N 42 E 70 LKS

SEE Photo #5
Exhibit "B"

(S 46° E, 46.9', 20' Pine)
S 46 E →
46.3'

28" DIA.
PINE

TAGS

1931 TAG

B-T SEC COT

9-74 TAG

N 48° W 89 LKS

EXHIBIT 'A'

Southeast Corner Section 25, T 27 N, R 12 E, Mount Diablo Meridian
(MDM)

Land mountainous. Soil 1st rate and 2nd rate.
Heavy timber Pine, Fir and Tamarac.
Undergrowth Manzanita.

S. 1° 26' West on a true line between Secs. 25 & 30
Var. 17° 30' East.

15.00 Enter flat bears E. & W.
18.35 Road bears N. W. & S. E.
22.00 Leave flat bears E. & W.
32.00 Summit. Descend.
40.00 Set granite stone 20 x 14 x 12 in stone mound for 1
Sec. Cor. from which a
Pine 22 in. in dia. bears N. 61° W. 60 lks dist.
" 26 " " " " S. 30° E. 56 " "
55.20 Brook 8 lks wide runs N. W.

80.00 Set a granite stone 18 x 18 x 10 in stone mound for Cor.
to Secs. 25, 30, 31 & 36, from which a
Pine 20 in. in dia. bears S. 46° E. 71 lks dist. 45.2
" 24 " " " " N. 42° E. 105 " " 18.1
" 30 " " " " S. 35° W. 60 " " 37.7
" 16 " " " " N. 26° W. 91 " " 60.5

Reference
#1

Land mountainous. Soil 1st and 2nd rate.
Heavy timber Pine, Fir, Spruce and Cedar.
Undergrowth Manzanita.

S. 1° 26' West on a true line between Secs. 31 & 36.
Var. 17° East.

40.00 Set a granite stone 24 x 20 x 4 in a stone mound for 1
Sec. Cor. from which
A Pine 16 in. in dia. bears N. 86° E. 81 lks dist.