

SURVEYOR'S CERTIFICATE

THIS MAP CORRECTLY REPRESENTS A SURVEY MADE BY ME OR UNDER MY
DIRECTION IN CONFORMANCE WITH THE REQUIREMENTS OF THE LAND SURVEYOR'S
ACT AT THE REQUEST OF SIERRA PACIFIC INDUSTRIES
IN AUGUST, 1980.

Otto Peters
OTTO PETERS LS 2561


COUNTY SURVEYOR'S CERTIFICATE

THIS MAP HAS BEEN EXAMINED FOR CONFORMANCE WITH THE REQUIREMENTS
OF THE LAND SURVEYOR'S ACT THIS 4th DAY OF December, 1981
(SIGNED) Lawrence J. Brock
LAWRENCE J. BROCK, RCE 13528
PLUMAS COUNTY SURVEYOR

RECORDER'S CERTIFICATE

FILED THIS 4th DAY OF December, 1981
AT 2:42 P.M. IN BOOK 6 OF Record of Surveys
AT PAGE 38, AT THE REQUEST OF THE COUNTY ENGINEER

(SIGNED) Ila Diggs
COUNTY RECORDER
BY Frances Nicol, Deputy
FEE \$5.00 FILE # 5130

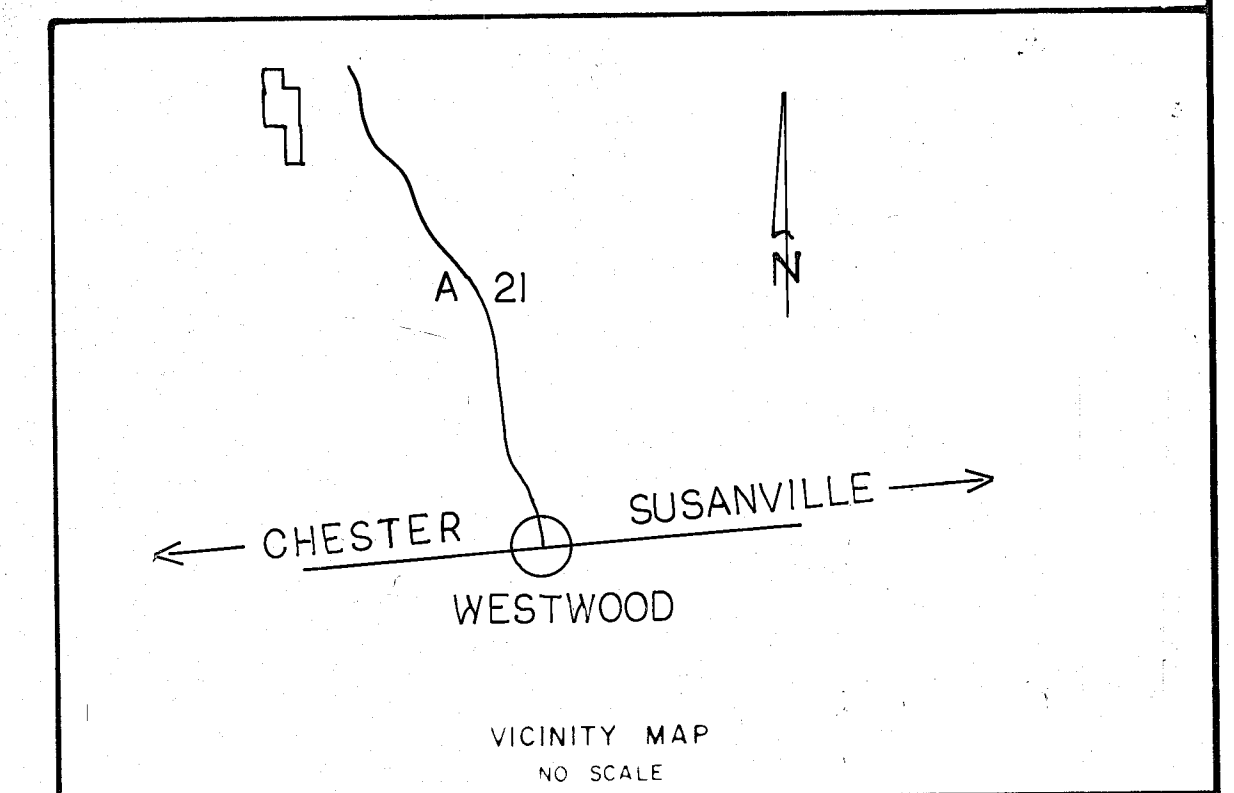

RECORD OF SURVEY

FOR
SIERRA PACIFIC INDUSTRIES
IN PORTIONS OF SECTIONS 27 & 34
T30N R8E, M.D.M.
IN THE UNINCORPORATED TERRITORY
OF PLUMAS COUNTY, CALIFORNIA

OTTO PETERS LS 2561
700 TIMBER RIDGE ROAD
LAKE ALMANOR CA. 96137

DATE: OCTOBER 19.80
SCALE: 1" = 700'
SHEET 1 OF 1

LEGEND

- ◆ FOUND ORIGINAL GOVERNMENT CORNER, AS NOTED BELOW
- + POSITION CALCULATED, NOT SET
- CORNER SET THIS SURVEY AS NOTED = 1" Brass Tags - LS 2561
- [] GLO DISTANCES
- ||| LINE BLAZED & RIBBONED

ORIGINAL GOVERNMENT CORNERS

- ① 3" BLM BRASS CAP
26" FIR S36°E
14" FIR S44°W
17" FIR N38°E
24" FIR N68°W
- ② 2" BLM BRASS CAP
- ③ STONE IN STONE MOUND - 3" BLM Brass Cap
12" L.P. PINE N48°E 6.6'
10" L.P. PINE N46°W 13.9'
- ④ 2" BLM BRASS CAP IN SMALL ROCK MOUND
43" P. PINE S41°E 64.0'
38" R. FIR N49°W 24.4'
- ⑤ STONE 24"x8"x4" - 3" BLM Brass Cap
6" L.P. PINE N37°W 16.5'
6" L.P. PINE S38°E 29.7'
- ⑥ MOUND OF STONE - Set 1" TBar Tagged LS 2561
35" R. FIR SNAG N55°E 46.5'
40" R. FIR S74°E 34.7'
50" W. FIR S16°W 68.0'
- ⑦ IRON POST - Tagged LS 2561
23" L.P. PINE N15°W 130.0'
- ⑧ 1" BOLT IN STONE MOUND - Tagged LS 2561
38" P. PINE SNAG S34°W 42.9'
14" L.P. PINE S75°E 23.8'
- ⑨ BRASS CAP IN ROCK MOUND - BLM
50" R. FIR N64°W 9.2'
46" R. FIR N20°E 2.6'
- ⑩ STONE 4"x6"x8" - 1" TBar alongside
REMAINS OF 26" P. PINE Tag - LS 2561
STUMP S23°E 15.8'
- ⑪ IRON STAKE IN STONE MOUND - Tagged by LS 2322
12" W. FIR S81°E 10.1'
24" R. FIR N2°E 18.7'

