

**FOUND STANDARD BLM MONUMENT
STAMPED AS SHOWN**

T25N R9E
S35 S36
S2 S1
T24N
1967
FWBS: 14"Pine N65°E, 40 lks.(R2)
12"Pine N52°W, 54 lks.(R2)
9"Pine S72 1/2°W, 41.5 lks.(R2)
14"Pine S62 1/2°E, 48.5 lks.(R2)

**FOUND STANDARD BLM
MONUMENT STAMPED
AS SHOWN**

N-S-N
1/256
S2 S1
1989

**FOUND STANDARD BLM
MONUMENT
STAMPED AS SHOWN**

T24N R9E
1/4
S2 S1
1989
FWBS: RM N33°03'E, 13 FT.(R1)


**FOUND STANDARD BLM
MONUMENT STAMPED
AS SHOWN**

T24N R9E
S2 S1
S11 S12
1989

FWBS:
18"Pine Blazed N30°30'E, 15 lks. (R1)
17"Pine Blazed S62°00'E, 75.5 lks.(R1)
20"Pine Blazed N60°00'W, 144 lks.(R1)

**SET STANDARD USFS MONUMENT
STAMPED AS SHOWN**

R8E S36 T25N
W 1/16 S1 T24N
LS 5623 FWBS: 10"B.O. N34°42'W, 17.0'
2003 10"PINE N64°32'E, 34.0'

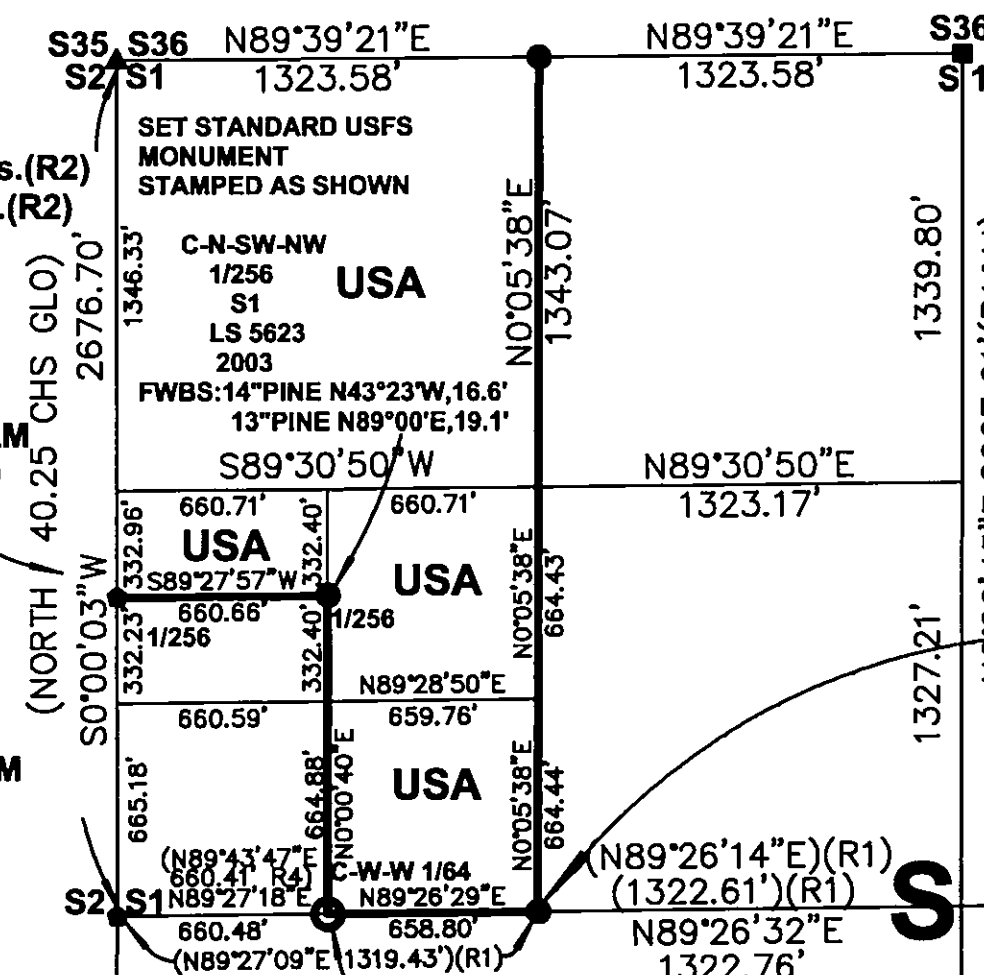
**FOUND STANDARD BLM MONUMENT
STAMPED AS SHOWN**

T25N R9E
1/4 S36
S1
T24N
1967
FWBS: 11"PINE N24°W, 23.5 lks.(R1)
9"PINE S14°E, 34.5 lks.(R1)

**FD LS3207 ACCEPTED AS PER
13RS1
REMONUMENTED WITH
STANDARD USFS MONUMENT
STAMPED AS SHOWN**

T24N R9E
S1 CW-1/16
LS 5623
2003
FWBS: 9"PINE N30°22'E, 6.5'
7"PINE S6°53'W, 11.1'

**FOUND STANDARD BLM MONUMENT
STAMPED AS SHOWN**

1/4
S1 S6
T24N
R9E R10E
1971
FWBS: 33"PINE SNAG N29°19E, 45
lks. (R1)

T24N
T23N

**VINCINITY MAP
NO SCALE**

34	35	36	31
3	2	1	6
10	11	12	7
15	14	13	18

R09E R10E

GENERAL NOTES

A STANDARD UNITED STATES FOREST SERVICE (USFS) DRIVE-IN MONUMENT IS A 5/8" DIAMETER ALUMINUM ROD WITH A 3-1/4" ALUMINUM CAP EDGE-MARKED WITH THE USFS LOGO.

A STANDARD BUREAU OF LAND MANAGEMENT (BLM) MONUMENT IS A 2-1/2" DIAMETER STEEL PIPE, 30" LONG WITH A 3-1/2" BRASS CAP EDGE-MARKED WITH THE BLM LOGO.

TO CONTROL THE E 1/4, S.E. SECTION CORNER, S.W. SECTION CORNER, RECORD TIES FROM R1 WERE USED. (JOHN HAMBY LS2843 FROM BOOK 13, PAGES 1-4)


SURVEY HISTORY

R1	13RS1-4	2004	HAMBY LS2843
R2	REMONUMENTATION	1970	BLM
R3	6RS133-134	1984	USFS
R4	2RS8	1958	BOWSER

**FOUND STANDARD USFS
MONUMENT STAMPED AS SHOWN**

T24N
R9E R10E
S1 S6
S12 S7
RCE 22148
1986

FWBS:
41"Cotton Wood N17°W, 28 lks.(R1)

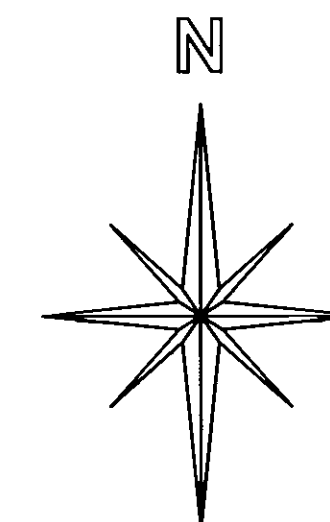

SCALE

1" = 600 FEET

0 600 1200

BASIS OF BEARING

MEASURED BEARINGS ARE BASED ON THE RECORD OF SURVEY RECORDED IN IN BOOK 13, PAGES 1-4 OF PLUMAS COUNTY RECORDS.

LEGEND

- FOUND AS NOTED
- FOUND BLM CORNER SET UNDER REMONUMENTATION SPECIAL INSTRUCTIONS. MEASUREMENTS TO BEARING TREES AGREE WITH (R1).
- SET STANDARD U.S. FOREST SERVICE DRIVE-IN MONUMENT (BEARING TREES AS NOTED)
- ◆ FOUND BLM CORNER SET UNDER SPECIAL INSTRUCTIONS NOT YET COMPLETED IN THE CALIFORNIA STATE OFFICE OF THE BLM. (MEASUREMENTS TO BEARING ACCESSORIES AGREE WITH THE UNRECORDED FIELD NOTES FOUND IN THE PLUMAS NATIONAL FOREST FILES.)
- FOREST BOUNDARY (FD. MKD. TO STANDARD)

R&M RECORD = MEASURED

SNOW LAND SURVEYING

8736 DAMSELFY DRIVE
RENO, NEVADA 89523
775-787- 8420

RLS 5623

RECORD OF SURVEY

SECTION 1, T24N R9E; SECTION 8, T22N R12E MDM
PLUMAS COUNTY, CALIFORNIA

FOR
U.S.D.A. FOREST SERVICE
P.O. BOX 11500, QUINCY, CA.

CREW:
B.SNOW
T.MASHEK

DRAWN BY: B.SNOW (2004)

SHEET 2 OF 2

