

CORNER RECORD

COUNTY OF Plumas T. 27 N R. 12 E Mt. Diablo MERIDIAN CALIFORNIACORNER TYPE: GOV'T. CORNER ☒ MEANDER ☐ RANCHO ☐ CONTROL ☐ OTHER ☐CORNER IDENTIFICATION — DATE OF VISIT 10/8 1998 revisit10-08-97

27	26
34	35

CORNER — LEFT AS FOUND ☒ FOUND AND TAGGED ☐ REESTABLISHED OBLITERATED CORNER ☐ REBUILT ☐

PHYSICAL DESCRIPTION OF CORNER FOUND; EVIDENCE AND METHOD USED TO IDENTIFY OR REESTABLISH

GLO Notes 1878

Granite stone 18" x 12" x 9"

Pine 10" dia. Bears N 47 1/2° W, 86 links (56.7 ft.)

Pine 8" dia. Bears S 64° E, 80 links (52.3 ft.)

Pine 40" dia. Bears N 45 1/4° E 242 links (159.7 ft.)

Pine 12" dia. Bears S 57° W, 134 links (88.4 ft.)

Found

Granite stone 15" x 12" x 7"

Pine 42" dia. Bears N 46° W, 57 ft.

Pine 20" dia. Bears S 63° E, 52 ft.

Pine 60" dia. 65" tall with readable scribe N 45° E, 194 ft.

Decaying stump 30" dia. Bears S 55° W, 88.5 ft. down portion has scribe & tag on piece of bark.

PHYSICAL DESCRIPTION OF MONUMENTS REBUILT OR PERPETUATED

CALIFORNIA COORDINATE SYSTEM ORDER: FIRST ☐ SECOND ☐ THIRD ☐
STATIONS USED: NGS (USC & GS) ☐ STATE ☐ COUNTY ☐ OTHER ☐ STATION _____
ZONE _____ ELEVATION _____ NORTHINGS (Y) _____ EASTINGS (X) _____

SKETCH: (Include reference tie or witness points, remarks and topo of area)

Attached: Exhibit 'A' Sketch, Exhibit 'B' Photos

References: (1) * GLO notes

(2) *U.S. Forest Service corner record form V-17 dated 5-6-65 from Quincy.

(3) Antelope Lake Quadrangle Map 604-1C

I believe that the GLO distance of 242 links should be 292 links, possible typographical error.

(60" Pine)

(159.7')

(192.7')

* indicates that a copy is included


SURVEYOR'S CERTIFICATE

THIS CORNER RECORD WAS PREPARED BY ME OR UNDER MY
DIRECTION IN CONFORMANCE WITH THE LAND SURVEYORS ACT
ON October 8, 1998SIGNED: James E. CoplantzL.S. or R.C.E. No. 340116

COUNTY SURVEYOR'S CERTIFICATE

THE CORNER RECORD WAS RECEIVED 10/20 1998
AND EXAMINED AND FILED 11/2 1998BY: Tom ShunkTITLE: Co. SurveyorDOCUMENT No. 161

STATEMENT ON BACK OF SHEET

No. 30515 YES ☐ NO ☐Exp. 3/31/00


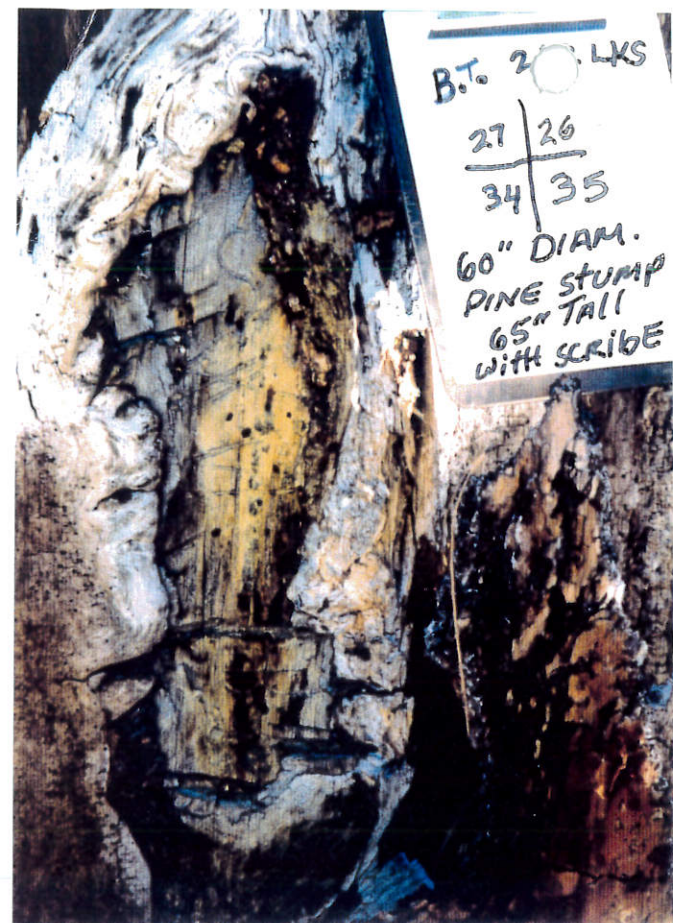
 $\# 1$

Exhibit 'B'
SOUTHEAST SECTION CORNER
OF SECTION 27
T 27N R 12E M.D.M.

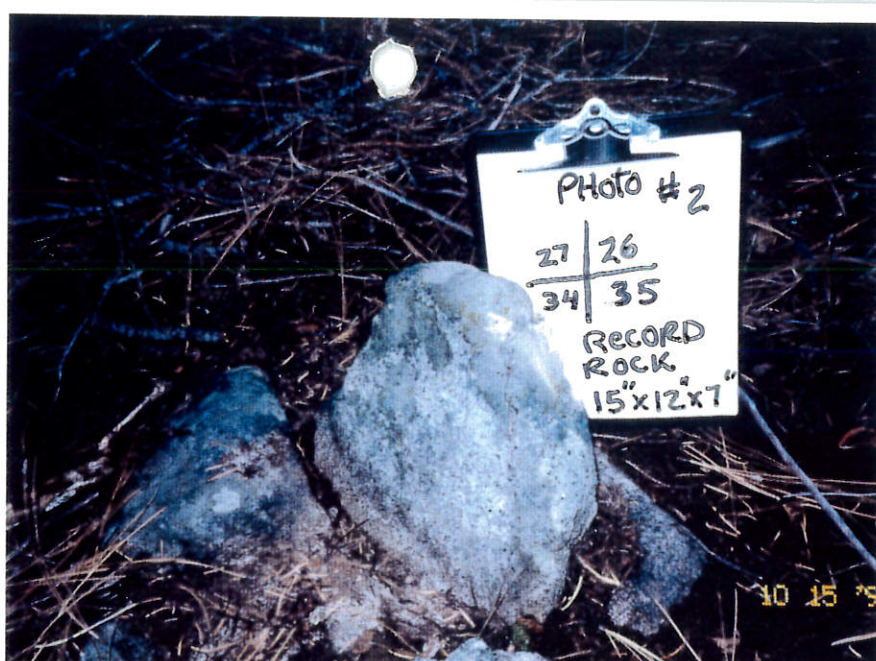

#3 FOUND 30" DIAMETER DECAYING LOG WITH SCARB

4 AREA VIEW

AREA VIEW OF ABOVE Photo



ME/10
MUSSETT

10-3-97

10-07-98

27 | 26
34 | 35

Record rock
18"x12"x9"

FND
SCRIBE

Photo #1
EXHIBIT 'B'

FND
60" DIAM.
PINE STUMP
65" TALL
SAWED
OFF.

MEADOW

No scale

42" DIAM
PINE

FND (N 47.5° W, 56.8', 10" pine)

SCAR

← N 46° W

57'
TO SCAR

K-TAG

COR BEARS

S 47° E

89 LINKS

EL.

5327

WALLACE
OXFORD

4-29-65

T 27 N

R 12 E

Legend

() indicates record GLO data from pg. 11

50 links off

(N 45 1/2° E, 159.7', 40" pine)

194' to scribe

N 45 E →

98'

Area View
Photo #4

TACK
SET IN
CRACK

FND RECORD
ROCK

15" x 12" x 7"

Photo #2, Exhibit 'B'

20" PINE

K-TAG

NO
VISIBLE
SCAR

ATTENTION
Forestry
sign

B+ SEC COR
SCRIBED.
ON SIGN

WALLACE
OXFORD

4-29-65

(S 57° W, 88.44', 12" pine)

← S 55° W

88.5'
TO FACE
OF TREE

SCRIBE ← FALLEN
TREE

Photo #3
Exhibit 'B'

FND

30" DIA.

DECAYING STUMP

36" TALL

FND SCRIBE ON FALLEN
DECAYING LOG.

DETAIL
OF SCRIBE

FND TAG
ON BARK

B.T., COR BEARS N 56 E

WALLACE, OXFORD

Pg 1

27 26
34 35-

END K-TAG
NORTH of ROAD
27N42
BEARING N

1.53 Miles

4 CHAINS

FROM
ANT 8

CRAIG DITMAN

10-8-84

T 27N R 12E

.35 of miles
FROM fork —
27N62 27N42
27N42

N.1°26'E. between sections 34 and 35.

Var. 17° 25' east.

which corner is a granite stone 30x15x4 from which a,
pine 35 inch diam. bears S.45 $\frac{1}{4}$ °E. 65 links dist.

fir 6 inch diam. bears N.51 $\frac{3}{4}$ °E. 84 links dist.

pine 33 inch diam. bears N.18 $\frac{3}{4}$ °W. 61 links dist.

pine 8 inch diam. bears S.52°W. 76 links dist.

18.06 Spring brook 3 links wide runs northwest.

40.00 Set a granite stone 16x16x6 in a stone mound for quarter
section corner from which a,

pine 20 inch diam. bears N.43°30'W. 65 links dist.

pine 22 inch diam. bears S.32°30'E. 130 links dist.

53.60 Ravine, course northwest.

80.00 Set a granite stone 18x12x9 in a stone mound for corner
to sections 26,27,34 and 35, from which a,

pine 10 inch diam. bears N.47 $\frac{1}{2}$ °W. 86 links dist.

pine 12 inch diam. bears S.57°W. 134 links dist.

pine 8 inch diam. bears S.64°E. 80 links dist.

pine 40 inch diam. bears N.45 $\frac{1}{4}$ °E. 242 links dist.

Land mountainous.

Soil second rate.

Heavy timber pine, fir and cedar.


Good grazing.

-//-

Reference # ~~11~~ 1

LAND CORNER RECORD

5680-2

1. T <u>27N R 12E</u> No. <u>V-17</u> Cor. <u>S Mer MD</u> State <u>California</u> N. F. <u>Plumas</u> Dist. <u>Greenville</u>	
2. Corner Status	3. Original Description Vol. _____ Page _____ Where Recorded _____
	4. Description of Corners: Original corner consists of a stone, 12x12x4, surrounded by a stone mound in excellent condition, 4 bearing trees located, 3 alive and one dead & standing.
7. Photo Identification Photo No. _____ Ident. By: _____	5. Investigation Notes: Ran south 40 chain from 1/4 corner corner to sections 34 & 35. Located corner and bearing trees. All B.T.'s posted. Scribing on 2 trees visible and grown over on the other 2 B.T.'s.
8. Plane Coordinate Position Data State _____ Zone _____ X _____ Y _____ Estab. By _____ Field Book No. _____ Where Filed _____	
9. Evaluation Authentic ☒ _____ Needs Verif. _____ Monument _____ Re-estab. _____ Survey _____ Land Status _____	
6. Signed <u>Kenneth Wallace</u> Title <u>Forester</u> Date <u>5-6-65</u>	

Reference #2