


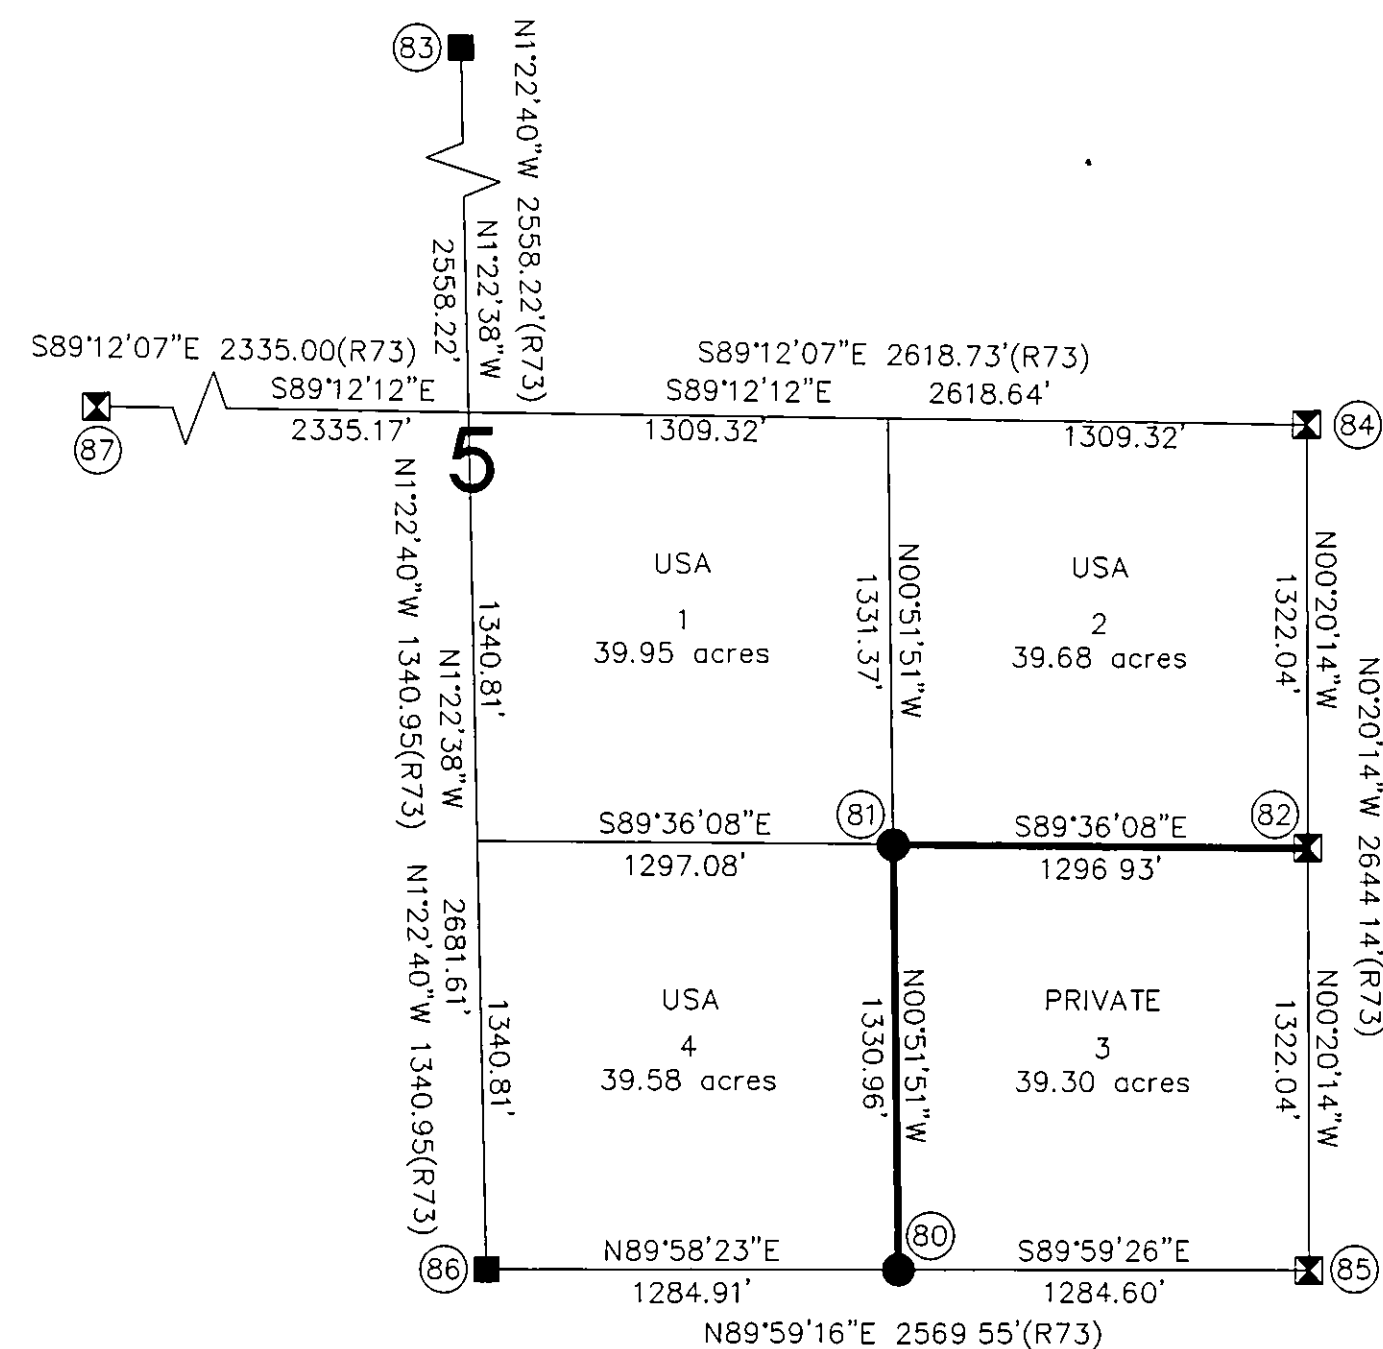

(80) RECORD: 1/2" OD STEEL PIPE W/METAL CAP, LS3297(R74)
FOUND: 1/2" OD STEEL PIPE W/METAL CAP, LS3297 (4PM29), ACCEPTED
SET: STANDARD U.S.F.S. MONUMENT(PIPE BURIED ALONG SIDE)
FWB: 12" P PINE N56°53'W 13.1FT
FWB: 14" P PINE N10°40'W 39.0FT

(81) RECORD: NONE
FOUND: NOTHING
SET: STANDARD U.S.F.S. MONUMENT
FWB: 15" P PINE S80°42'W 9.0FT
FWB: 13" P PINE N10°50'E 11.9FT

(82) RECORD: STANDARD B.L.M. MONUMENT(R9)
FOUND: B.L.M. W/BRASS CAP, ACCEPTED
FWB: 19" P PINE N64°53'W 24.8FT
FWB: 16" P PINE N18°41'E 25.0FT
SET: NOTHING

(83) RECORD: STANDARD U.S.F.S. MONUMENT(R73)
FWB: 12" P PINE N40°16'E 28.4FT
FWB: 16" D FIR S66°20'W 8.8FT
FOUND: STANDARD U.S.F.S. MONUMENT(R73), ACCEPTED
SET: NOTHING



(84) RECORD: STANDARD B.L.M. MONUMENT(R9)
FWB: 27" P PINE S27°12'E 22.0FT
FWB: 10" P PINE N62°54'E 13.0FT
FOUND: STANDARD B.L.M. MONUMENT(R9), ACCEPTED
SET: NOTHING

(85) RECORD: STANDARD B.L.M. MONUMENT(R9)
FOUND: STANDARD B.L.M. MONUMENT, ACCEPTED.
FWB: 28" P PINE N78°02'W 18.4FT
FWB: 8" J PINE N11°24'W 11.3FT
FWB: 15" J PINE N19°31'E 13.5FT
FWB: 16" J PINE S54°02'E 16.8FT
FWB: 15" J PINE S35°25'W 16.5FT
SET: NOTHING

(86) RECORD: STANDARD U.S.F.S. MONUMENT(R73)
FOUND: STANDARD U.S.F.S. MONUMENT(R73), ACCEPTED
FWB: 17" J PINE S8°11'W 48.1FT
FWB: 31" P PINE N87°25'W 38.7FT
FWB: 11" J PINE N44°08'W 18.6FT
SET: NOTHING

(87) RECORD: STANDARD B.L.M. MONUMENT(R9)
FOUND: STANDARD B.L.M. MONUMENT, ACCEPTED
FWB: 30" J PINE S80°56'W 22.2 FT
FWB: 52" JUNIPER N33°22'E 49.8 FT
SET: NOTHING

STATE PLANE COORDINATES CALIFORNIA - ZONE 1 1983		
0 AT THE CN 1/16 CORNER OF SECTION 14 T22N, R13E = 00°52'32"		
CORNER #	NORTHING	EASTING
83	1816068.360	6971114.074
87	1813543.345	6968840.613
84	1813474.473	6973793.943
82	1812152.452	6973801.726
81	1812161.617	6972504.829
86	1810830.040	6971240.002
80	1810830.646	6972524.908
85	1810830.431	6973809.509
MULTIPLY MEASURED DISTANCES BY 1.000064869 TO GET GROUND DISTANCES		

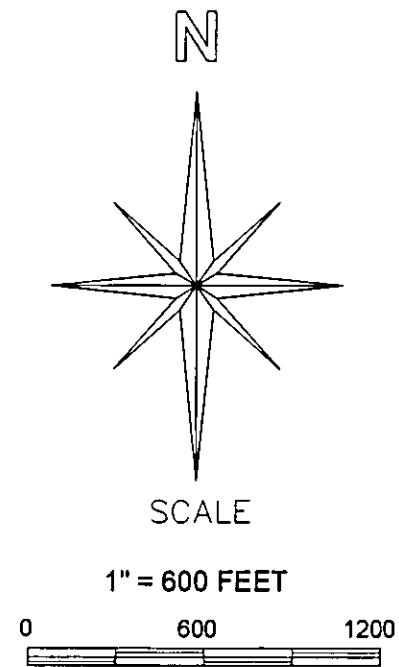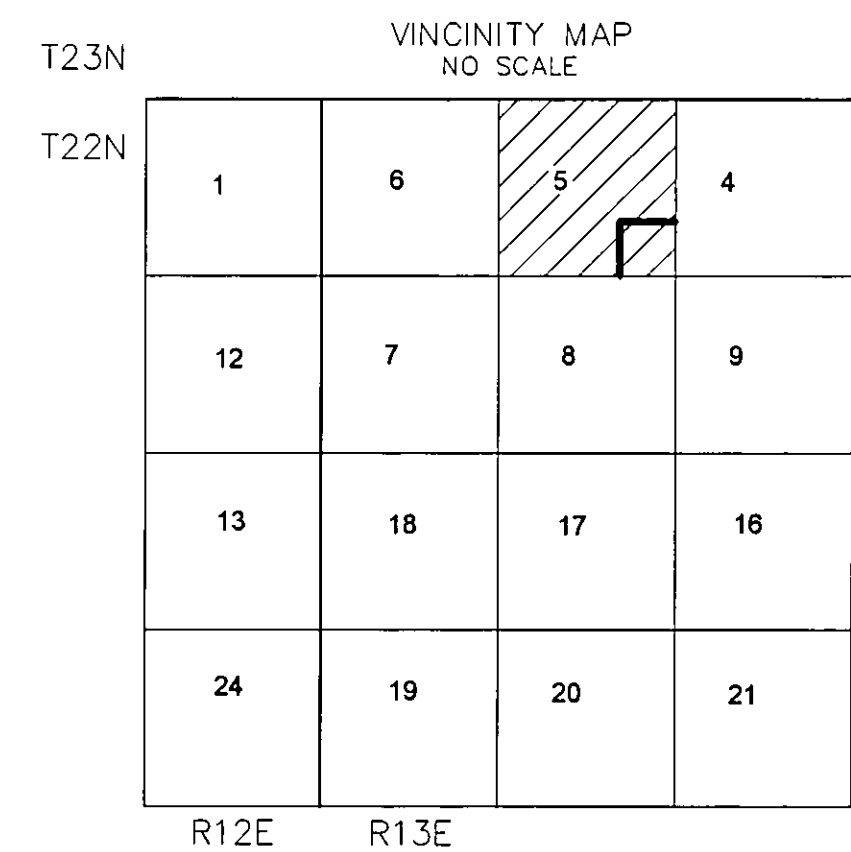

BASIS OF BEARINGS
SEE SHEET 1 OF 11

GENERAL NOTES

A STANDARD UNITED STATES FOREST SERVICE (USFS) DRIVE-IN MONUMENT IS A 5/8" DIAMETER ALUMINUM ROD WITH A 3-1/4" ALUMINUM CAP EDGE-MARKED WITH THE USFS LOGO

A STANDARD BUREAU OF LAND MANAGEMENT (BLM) MONUMENT IS A 2-1/2" DIAMETER STEEL PIPE, 28" LONG WITH A 3-1/2" BRASS CAP EDGE-MARKED WITH THE BLM LOGO

SURVEY HISTORY

R9	DEPENDENT SURVEY	BLM	1985	SNOW
R73	11 RS 120	LS 5623	2000	SNOW
R74	4 PM 29	LS 3297	1973	G. HENDERSON

LEGEND

- FOUND BLM CORNER
- FOUND USFS CORNER
- CORNERS CALCULATED
- FOUND LS CORNER
- CORNER NOTE
- SET STANDARD U.S. FOREST SERVICE DRIVE-IN MONUMENT (BEARING TREES AS NOTED)
- PROPERTY BOUNDARY MARKED AND POSTED
- FWB FROM WHICH BEARS
- G.L.O. GOVERNMENT LAND OFFICE NOTES
- P PINE PONDEROSA PINE
- D FIR DOUGLAS FIR
- BT BEARING TREE

RG

RONALD
GREENWELL
& ASSOCIATES INC.

10 S. LAKE DRIVE, SUITE 1
ANTIOCH, CA 94509-2057
(925) 778-0626

RECORD OF SURVEY
SECTION 5, T22N R13E, MDM,
PLUMAS COUNTY, CALIFORNIA

FOR
U.S.D.A. PLUMAS NATIONAL FOREST
P O BOX 11500, QUINCY, CA.
CREW: D. GREENWELL
B. SNOW
P. GOSS
C. BURDICK
DRAWN BY: B. HARTMAN
DATE: JANUARY 3, 2006